



WEVER & DUCRÉ
LIGHTING

STRIPE 0.4

305151B4

Project

Type

Notes

Quantity

Date

GENERAL

Wall

Recessed

Jet Black

IP20

Interior

11^a to 19^b lm

RAL 9005 ^c

LED

3000 K

CRI 80

L90 / 50000 h

3-step binning

PHYSICAL

Length 35 mm

Width 37 mm

Height 70 mm

0.09 kg

ELECTRICAL

excl. power supply

3 V

Total connected power 1.4^a to 2.8^b W

350^a to 700^b mA

PC3

Safety distance 0.3 m

CUTOUT

Length 25 mm

Width 56 mm

Min. ceiling thickness 8 mm




Max. ceiling thickness 18 mm

Recessed depth 40 mm


^a 350mA

^b 700mA

^c RAL Palette colors may deviate slightly due to production conditions.

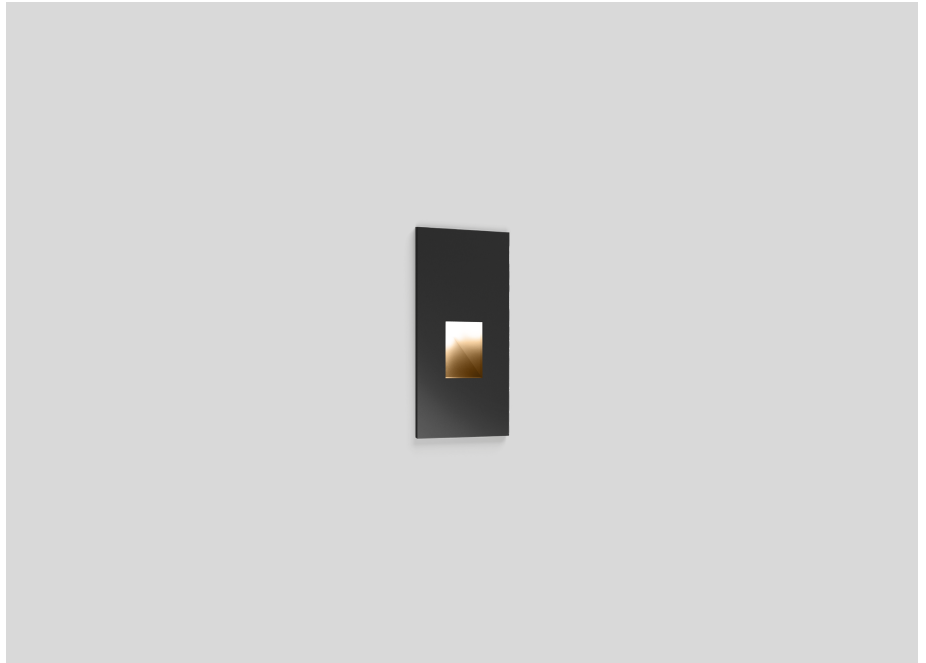

LIGHT DISTRIBUTION

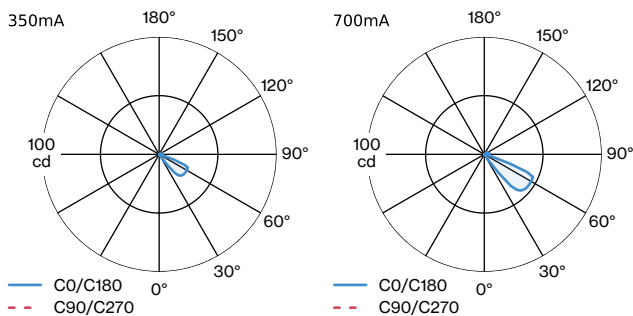



WEVER & DUCRÉ
LIGHTING

STRIPE 0.4

305151B4

MOUNTING

Plasterkit + Recessed Housing

TYPE	L · W · H (MM)	ORDERCODE
STRIPE 0.4 0.7	100 · 61 · 100	9 0 0 1 2 0 3 7

POWER SUPPLIES

Power Supply

TYPE	L · W · H (MM)	ORDERCODE
Driver 6W 350mA 3-22V	64 · 35 · 21	9 0 2 1 3 2 0 2
Driver 6W 700mA 3-8.4V	64 · 35 · 21	9 0 2 1 5 2 0 3